

Hydrex

NATURAL EFFECT SEALER

Sealing treatment with a natural effect. The ease of application also makes it ideal for large surfaces. The product complies with the global migration limits referred to Regulations DM 21/03/1973 and EU Regulations 10/2011.

Untreated



Treated



EASY TO APPLY



ALSO IDEAL FOR LARGE AREAS



DOES NOT CREATE FILMS

Technical data:

- ◆ **Density at 25°C kg/l:** 0.800
- ◆ **Standard colour:** colourless
- ◆ **Appearance:** opalescent liquid

Indicative duration:

- ◆ **Indoor:**
12-24 months
- ◆ **Outdoor:**
6-12 months

The stated consumption is merely indicative



Solvent based



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011
Indoor
Outdoor

Tools:

- ◆ Brush
- ◆ Cloth
- ◆ Sponge
- ◆ Spray nebulizer



Natural stone



Quartz



Ceramic

How to apply it:

- ◆ Apply the product to a dry, clean surface.
- ◆ Apply the product evenly.
- ◆ Do not direct expose to sunlight during application.
- ◆ After a few minutes, wipe off excess product with a clean cloth.
- ◆ Do not step on the treated surface for 4-6 hours.
- ◆ The material will achieve the desired protection after 24 hours.

Indicative consumption 1 l:

Consumption depends on the porosity of the material

Lava stone and marble	30-40m ²
Quartz	20-30m ²

Safety measures:

Read the instructions in the technical and safety data sheet and the notes on the packaging before use. Close the container after use. For professional use only.

Warnings:

When a surface is treated for the first time, it is advisable to evaluate the effect or adhesion on a sample or hidden corner.



Opening the can



Dampen the cloth




Product application



Excess removal



Protective effect

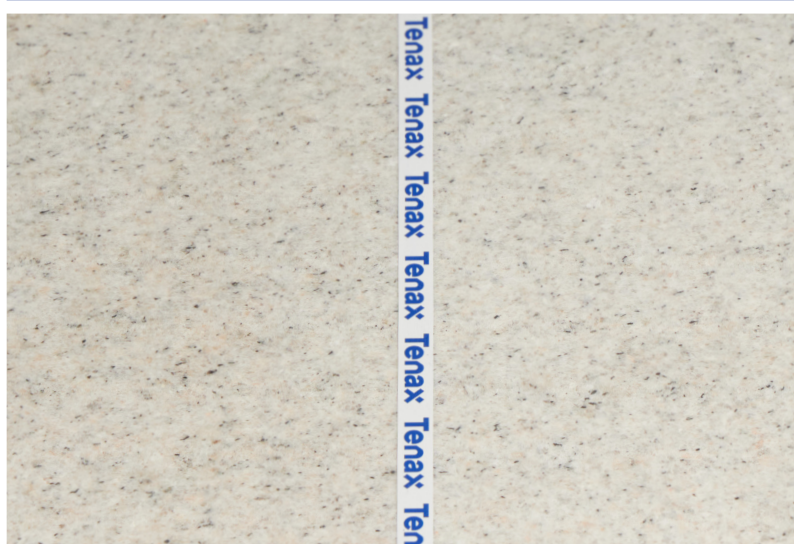

Final result